


Group 2 Gear Pumps & Unidirectional Motors



MODEL	2PE/2ME	
TYPE	GEAR PUMP / MOTOR	
PORTING**	INLET : 1-1/16 UNO (SAE 12)	OUTLET : 7/8 UNO (SAE 10)

** PORTS REVERSED ON UNIDIRECTIONAL MOTORS

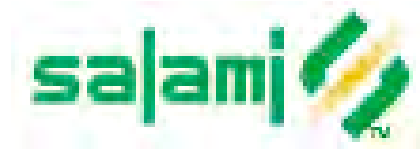

MODEL	3.2*	4.5	6.2	8.3	10.5	11.3	12.5	13.8	16	19	22.5	26
DISPLACEMENT	3.2	4.6	6.5	8.2	10.6	11.5	12.7	13.8	16.6	19.4	22.9	25.8
WORKING PRESSURE bar	250									220	200	180
psi	3600									3140	2900	2600
INTERMITTENT PRESSURE bar	280									240	220	200
psi	4000									3450	3140	2900
PEAK PRESSURE bar	300									260	240	220
psi	4300									3750	3450	3140
MAX RPM (At intermittent)	4000			3500					3000		2750	2500
MIN RPM (At working)	600			500					400		400	300

* Rear Pump only

OPTIONS :

SAE 'A' 2BLT FLANGE WITH 5/8 KEYED OR 5/8 9T SPLINED SHAFT. (3/4 KEYED AVAILABLE FOR 22.5 & 26).

SAE 'A' 4BLT FLANGE WITH 1:8 TAPER, DIN MOUNT. ALL SIZES.

OTHER PORTING AVAILABLE UPON REQUEST.

BLANK BODY WITH PORTED REAR COVER.

REAR COVER WITH RELIEF VALVE.

OUTRIGGER BEARING SUPPORT (Pictured).

[Return to Home Page](#)

