



VDM6 MONOBLOCK VALVE

MODEL	VDM6
TYPE	MONOBLOCK
FLOW	45 LPM
CIRCUIT	PARRALLEL ONLY
MAX PRESSURES	P=350bar A&B=350bar T=25bar
MAIN RELIEF	Std 175 bar - options available
PORT RELIEF	NIL
POWER BEYOND	OPTIONAL
PORTS - UNO	P=3/4 A/B=3/4 T=7/8

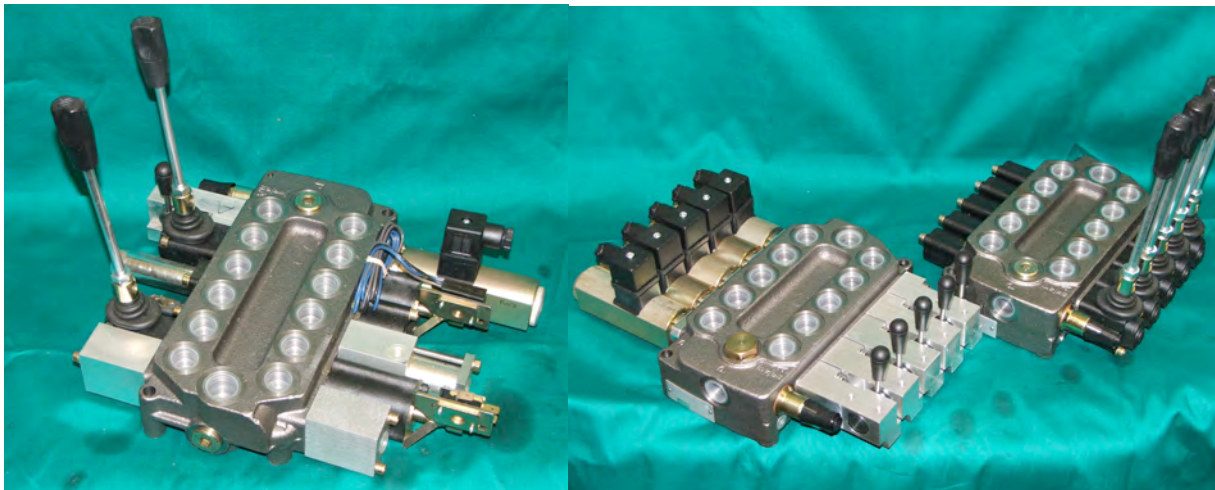

NUMBER OF SPOOLS	1 TO 7
SPOOL TYPES	CYLINDER MOTOR SINGLE ACTING FLOAT
SPOOL CONTROLS AND OPTIONS	MANUAL PNEUMATIC CABLE REMOTE 12V SOLENOID 24V SOLENOID MICROSWITCH JOYSTICK (2 SPOOL) DETENT HYDRAULIC PILOT

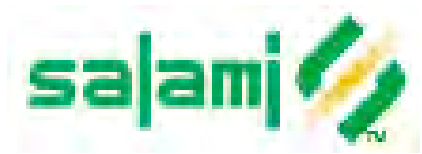